

**NOT FOR  
CONSTRUCTION**

**NOTES**

1. EXTERIOR WALL STUDS ARE ASSUMED 2" X 8" (NOM). VERIFY IF SUFFICIENT GIVEN REGIONAL ENERGY REQUIREMENTS.
2. INTERIOR WALL STUDS ARE ASSUMED 2" X 4" (NOM).
3. WALLS ARE ASSUMED 92-5/8" PRE-CUT STUDS W/ ONE BOTTOM PLATE & TWO TOP PLATES.
4. FLOOR JOISTS ARE ASSUMED 2" X 10" (NOM). VERIFY IF SUFFICIENT BASED ON LOCAL CODE & WOOD SPECIES/GRADE.
5. SUBFLOORS ARE ASSUMED 5/8" PLYWOOD.
6. EXTERIOR WALL SHEATHING IS ASSUMED 5/8" PLYWOOD. SIDING IS NOT DEPICTED IN PLAN VIEW.
7. INTERIOR WALL FINISHES ARE ASSUMED 1/2" DRYWALL.
8. CEILING FINISH IS ASSUMED 5/8" DRYWALL.
9. INTERIOR FLOOR FINISHES ARE NOT DEPICTED IN THIS WORK. FLOOR FINISHES TO BE SMOOTH, STABLE, FIRM, & SLIP-RESISTANT. WHERE CARPET IS PROVIDED, CARPET PILE IS TO BE NO HIGHER THAN 1/2". TRANSITIONS BETWEEN FLOOR FINISHES SHOULD BE SMOOTH & FLUSH WHEREVER POSSIBLE. WHERE NOT POSSIBLE, THE MAXIMUM VERTICAL LEVEL CHANGE IS 1/4". THE MAXIMUM BEVELED LEVEL CHANGE IS 1/4", PROVIDED THE TOP 1/4" IS BEVELED AT A MAXIMUM SLOPE OF 1:2.
10. ROOF SLOPES ARE EQUAL ON EITHER SIDE OF RIDGE UNLESS OTHERWISE NOTED.
11. COORDINATE DIMENSIONS AT CLOSETS W/ INTENDED ELEVATOR SPECIFICATIONS, WHERE APPLICABLE.
12. HARDSCAPE SLOPES INDICATED FOR REFERENCE ONLY. ACTUAL SLOPES VARY BY SITE. SIDEWALK SLOPES ARE NOT TO EXCEED 5% TO REMAIN WHEELCHAIR ACCESSIBLE WITHOUT THE NEED FOR HANDRAILS.
13. ALL DIMENSIONS SHOWN ARE MEASURED FROM FACE-OF-STUD UNLESS OTHERWISE NOTED.

**ABBREVIATIONS**  
CLR. - CLEAR  
F.F. - FINISH FLOOR  
T.O. - TOP OF


**LifeHouse 1.2**

2 STORY, 5 BED, 3 BATH HOME


DATE 2020

**Dimensioned Plans**

**A-101**

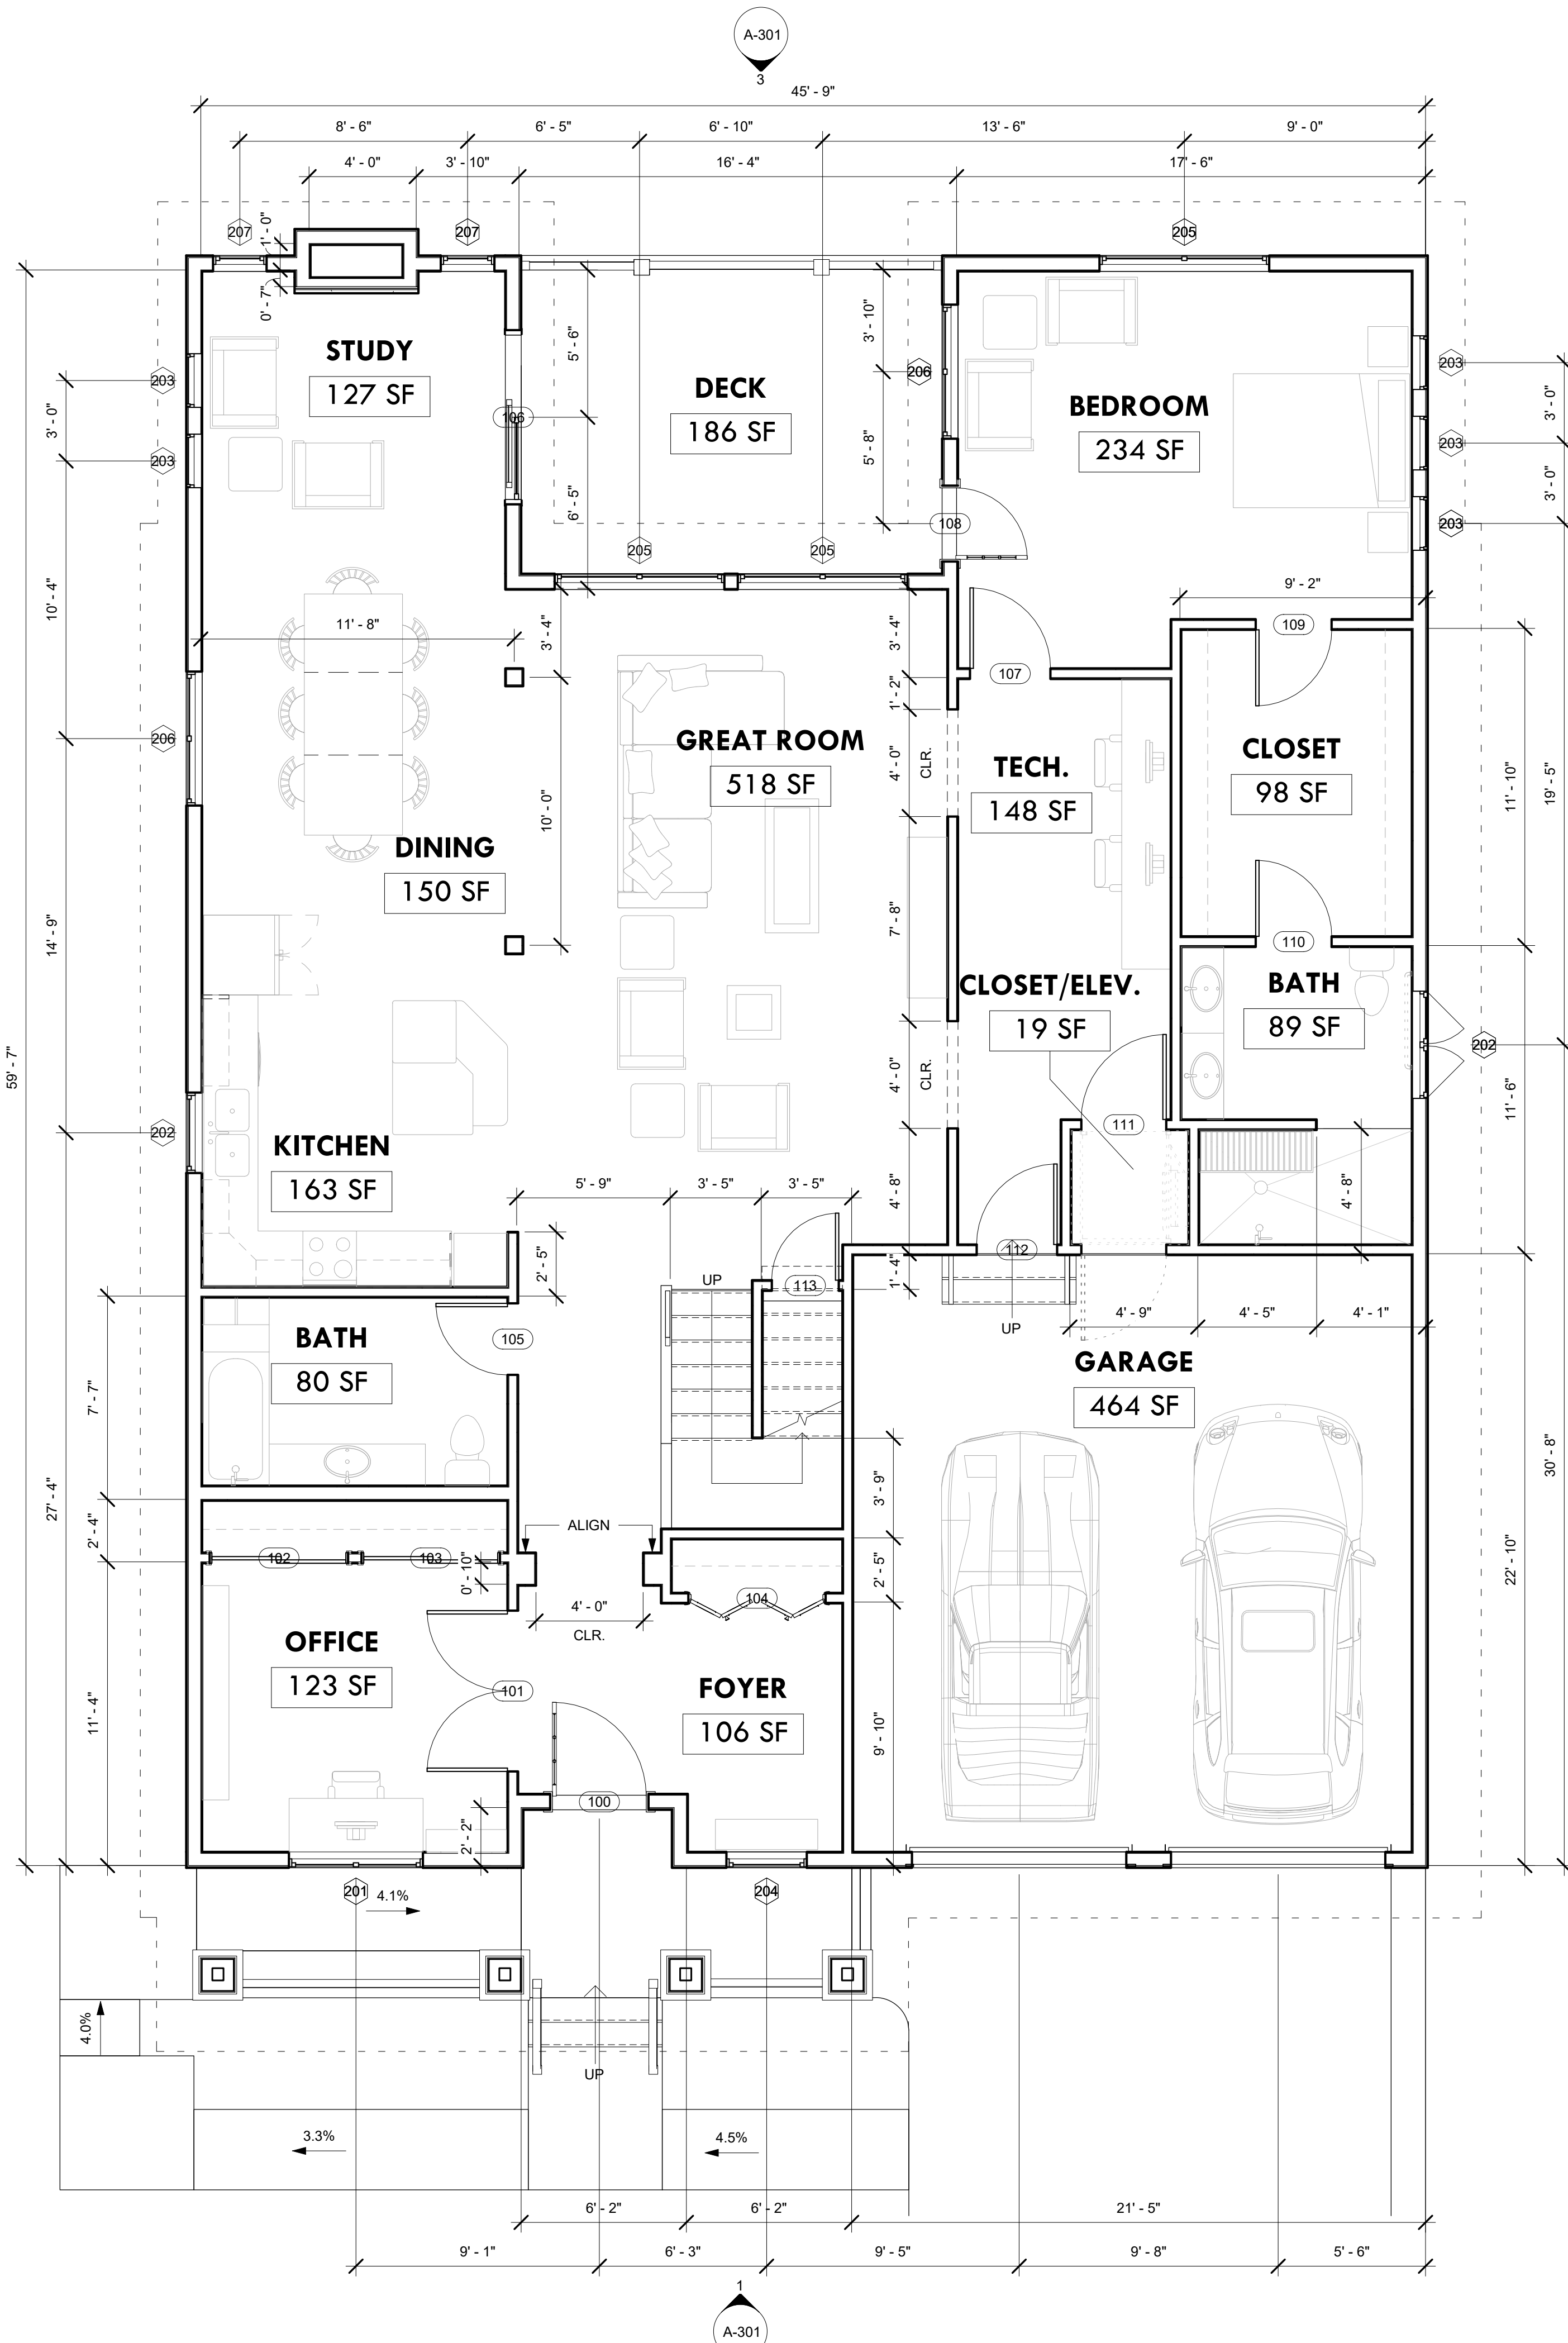

1 FIRST FLOOR PLAN  
1/4" = 1'-0"

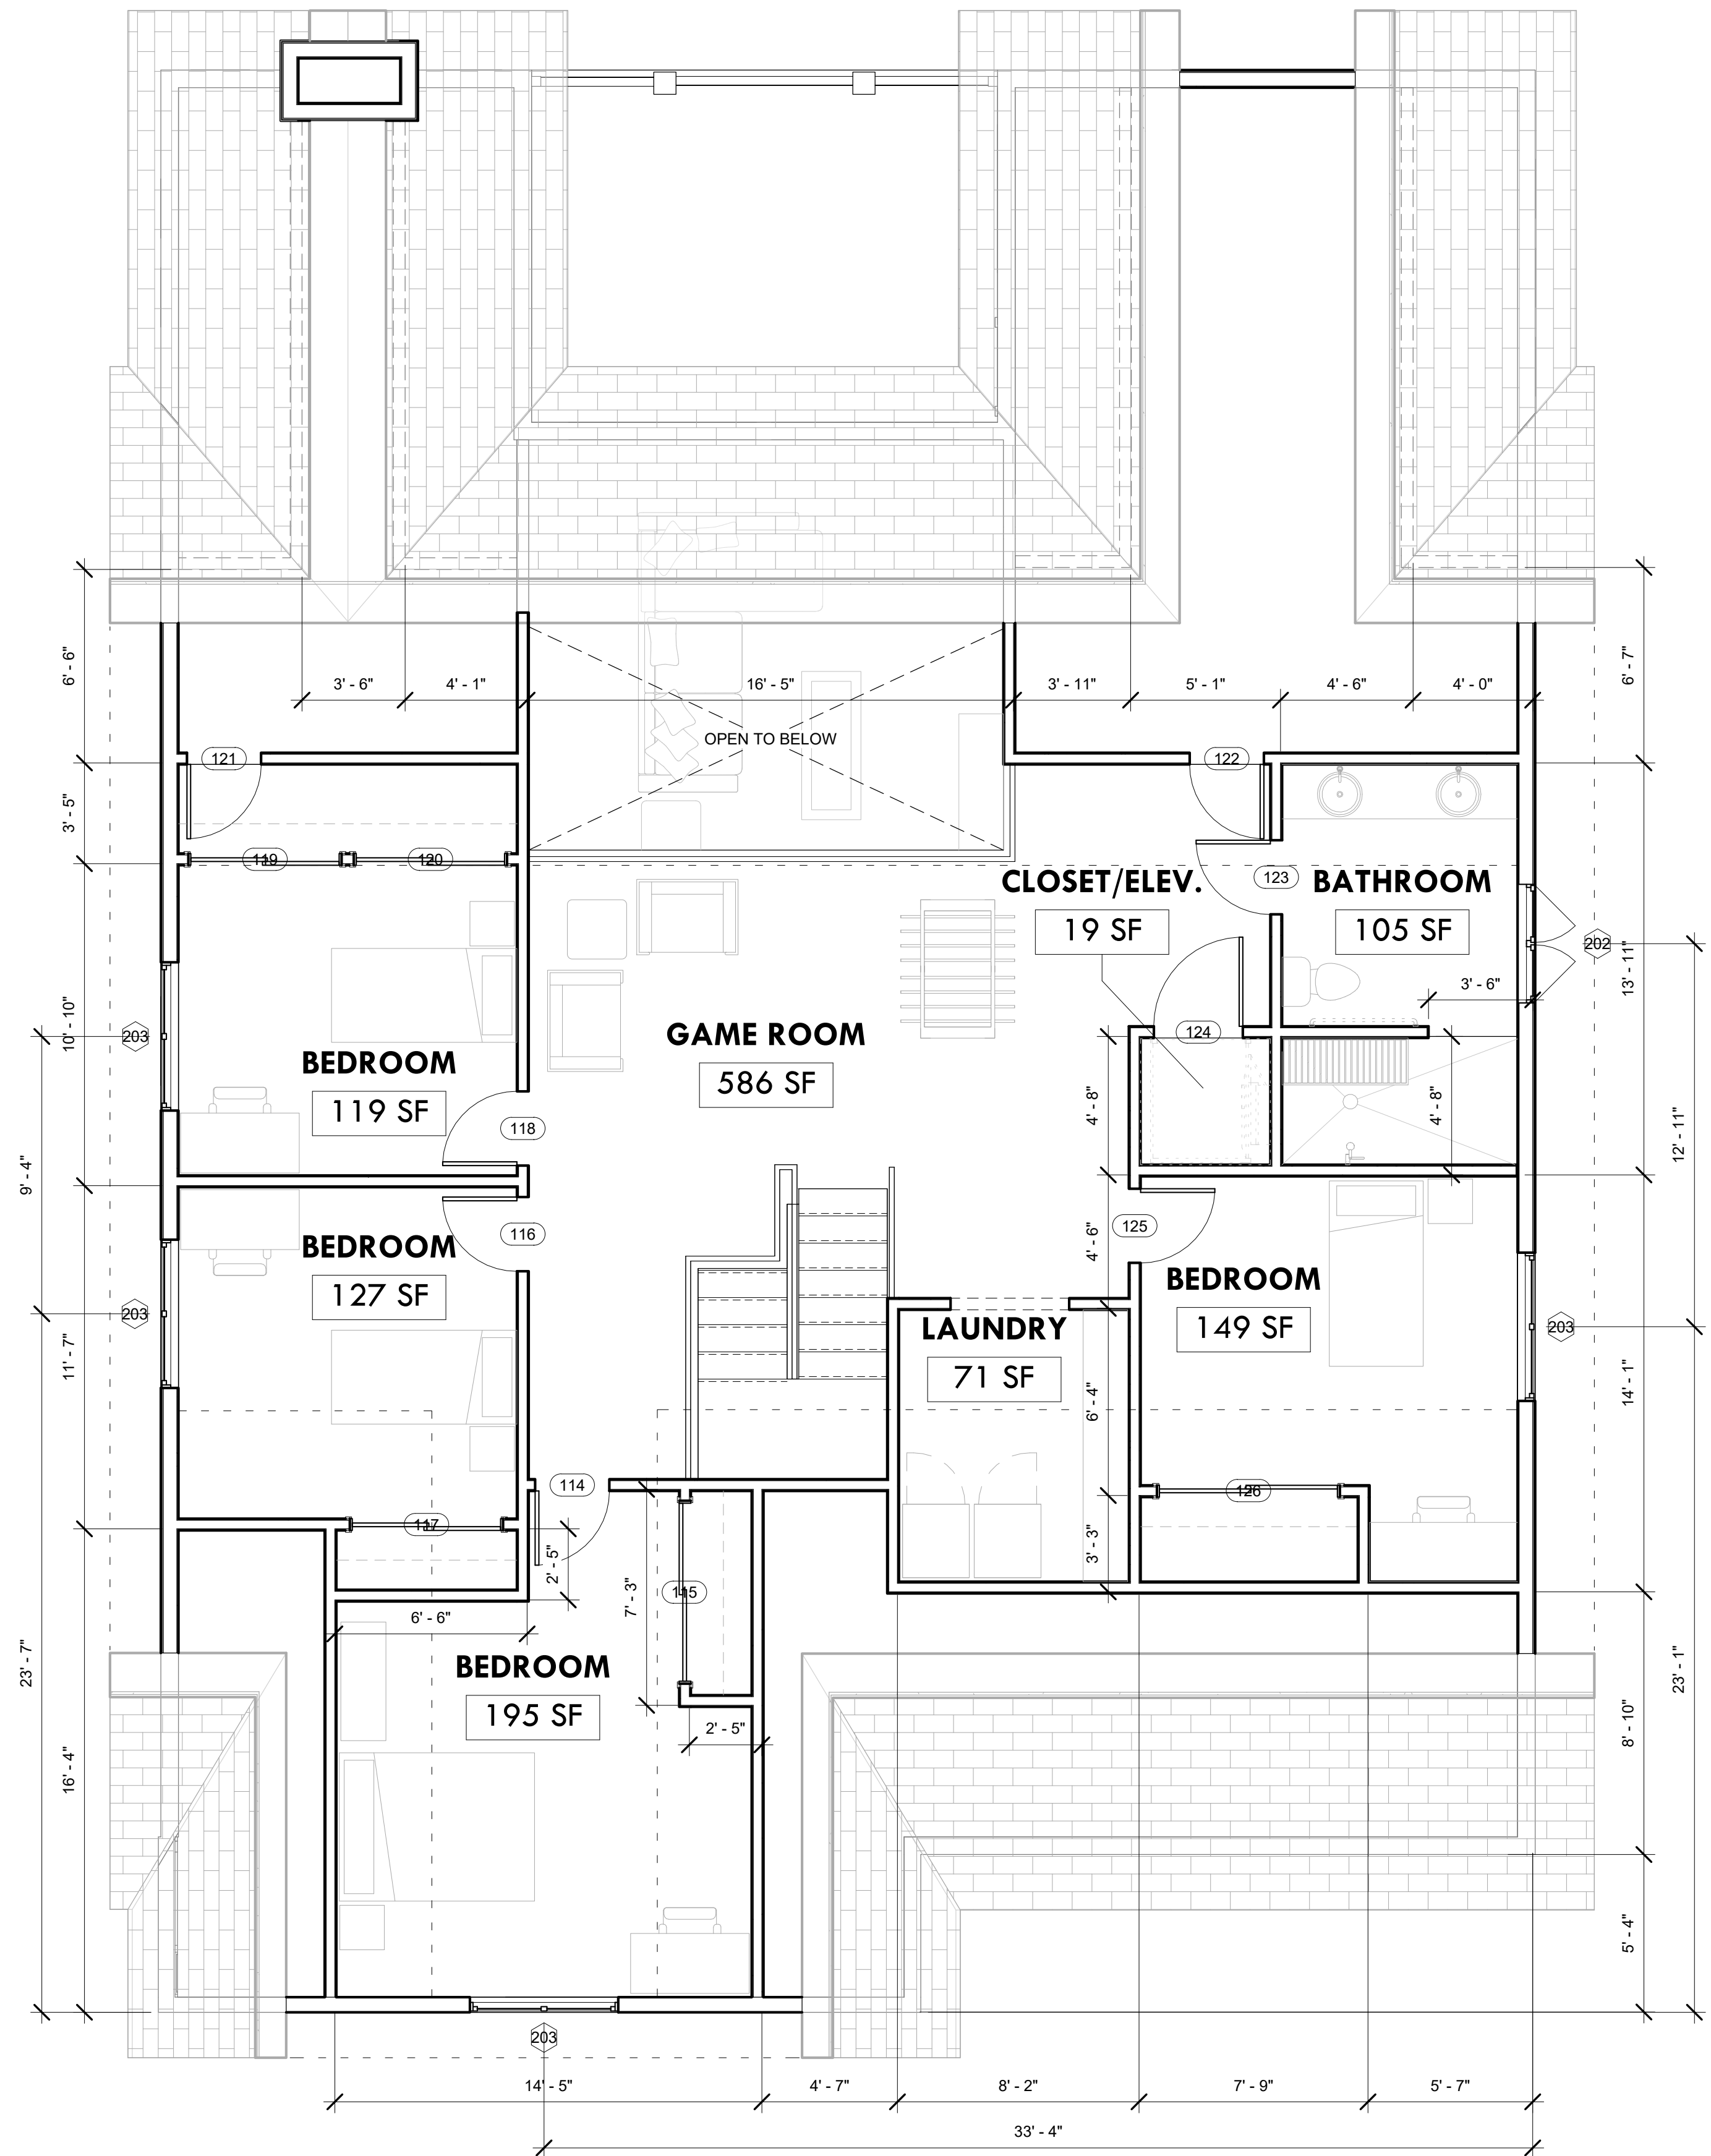

2 SECOND FLOOR PLAN  
1/4" = 1'-0"

**NOT FOR  
CONSTRUCTION**

**Door Schedule**

Door Number	Panel			Comments
	Width	Height	Thickness	
100	3' - 6"	7' - 8"	0' - 1 3/4"	
101	6' - 0"	7' - 0"	0' - 1 1/2"	Paired
102	5' - 0"	7' - 0"	0' - 1 1/2"	Sliding
103	5' - 0"	7' - 0"	0' - 1 1/2"	Sliding
104	5' - 0"	7' - 0"	0' - 1 1/2"	Bifold
105	2' - 8"	7' - 0"	0' - 1 1/2"	
106	6' - 6"	7' - 0"	0' - 1 3/4"	Sliding
107	3' - 0"	7' - 0"	0' - 1 1/2"	
108	2' - 8"	7' - 8"	0' - 1 3/4"	
109	2' - 10"	7' - 0"	0' - 1 1/2"	
110	2' - 10"	7' - 0"	0' - 1 1/2"	
111	3' - 2"	7' - 0"	0' - 1 1/2"	
112	3' - 0"	7' - 0"	0' - 1 1/2"	
113	2' - 6"	7' - 0"	0' - 1 1/2"	
114	2' - 6"	7' - 0"	0' - 1 1/2"	
115	6' - 0"	7' - 0"	0' - 1 1/2"	Sliding
116	2' - 6"	7' - 0"	0' - 1 1/2"	
117	5' - 0"	7' - 0"	0' - 1 1/2"	Sliding
118	2' - 6"	7' - 0"	0' - 1 1/2"	
119	5' - 0"	7' - 0"	0' - 1 1/2"	Sliding
120	5' - 0"	7' - 0"	0' - 1 1/2"	Sliding
121	2' - 6"	7' - 0"	0' - 1 1/2"	
122	2' - 6"	7' - 0"	0' - 1 1/2"	
123	2' - 6"	7' - 0"	0' - 1 1/2"	
124	3' - 0"	7' - 0"	0' - 1 1/2"	
125	2' - 6"	7' - 0"	0' - 1 1/2"	
126	6' - 0"	7' - 0"	0' - 1 1/2"	Sliding

**Window Schedule**

Window Type	Width	Height	Sill Height
202	3' - 0"	4' - 0"	4' - 0"
203	5' - 0"	4' - 0"	3' - 4"
204	3' - 0"	6' - 0"	2' - 0"
205	6' - 4"	6' - 0"	2' - 0"
206	5' - 0"	5' - 0"	3' - 0"
207	2' - 0"	6' - 0"	2' - 0"


**NOTES**

1. EXTERIOR WALL STUDS ARE ASSUMED 2" X 8" (NOM.), VERIFY IF SUFFICIENT GIVEN REGIONAL ENERGY REQUIREMENTS.
2. INTERIOR WALL STUDS ARE ASSUMED 2" X 4" (NOM.).
3. WALLS ARE ASSUMED 92-5/8" PRE-CUT STUDS W/ ONE BOTTOM PLATE & TWO TOP PLATES.
4. FLOOR JOISTS ARE ASSUMED 2" X 10" (NOM.), VERIFY IF SUFFICIENT BASED ON LOCAL CODE & WOOD SPECIES / GRADE.
5. SUBFLOORS ARE ASSUMED 5/8" PLYWOOD.
6. EXTERIOR WALL SHEATHING IS ASSUMED 5/8" PLYWOOD. SIDING IS NOT DEPICTED IN PLAN VIEW.
7. INTERIOR WALL FINISHES ARE ASSUMED 1/2" DRYWALL.
8. CEILING FINISH IS ASSUMED 5/8" DRYWALL.
9. INTERIOR FLOOR FINISHES ARE NOT DEPICTED IN THIS WORK. FLOOR FINISHES TO BE SMOOTH, STABLE, FIRM, & SLIP-RESISTANT. WHERE CARPET IS PROVIDED, CARPET PILE IS TO BE NO HIGHER THAN 1/2". TRANSITIONS BETWEEN FLOOR FINISHES SHOULD BE SMOOTH & FLUSH WHEREVER POSSIBLE. WHERE NOT POSSIBLE, THE MAXIMUM VERTICAL LEVEL CHANGE IS 1/4". THE MAXIMUM BEVELED LEVEL CHANGE IS 1/4", PROVIDED THE TOP 1/4" IS BEVELED AT A MAXIMUM SLOPE OF 1:2.
10. ROOF SLOPES ARE EQUAL ON EITHER SIDE OF RIDGE UNLESS OTHERWISE NOTED.
11. COORDINATE DIMENSIONS AT CLOSETS W/ INTENDED ELEVATOR SPECIFICATIONS, WHERE APPLICABLE.
12. HARDSCAPE SLOPES INDICATED FOR REFERENCE ONLY. ACTUAL SLOPES VARY BY SITE. SIDEWALK SLOPES ARE NOT TO EXCEED 5% TO REMAIN WHEELCHAIR ACCESSIBLE WITHOUT THE NEED FOR HANDRAILS.
13. ALL DIMENSIONS SHOWN ARE MEASURED FROM FACE-OF-STUD UNLESS OTHERWISE NOTED.

**ABBREVIATIONS**  
CLR. - CLEAR  
F.F. - FINISH FLOOR  
T.O. - TOP OF




1 SOUTH ELEVATION  
1/8" = 1'-0"

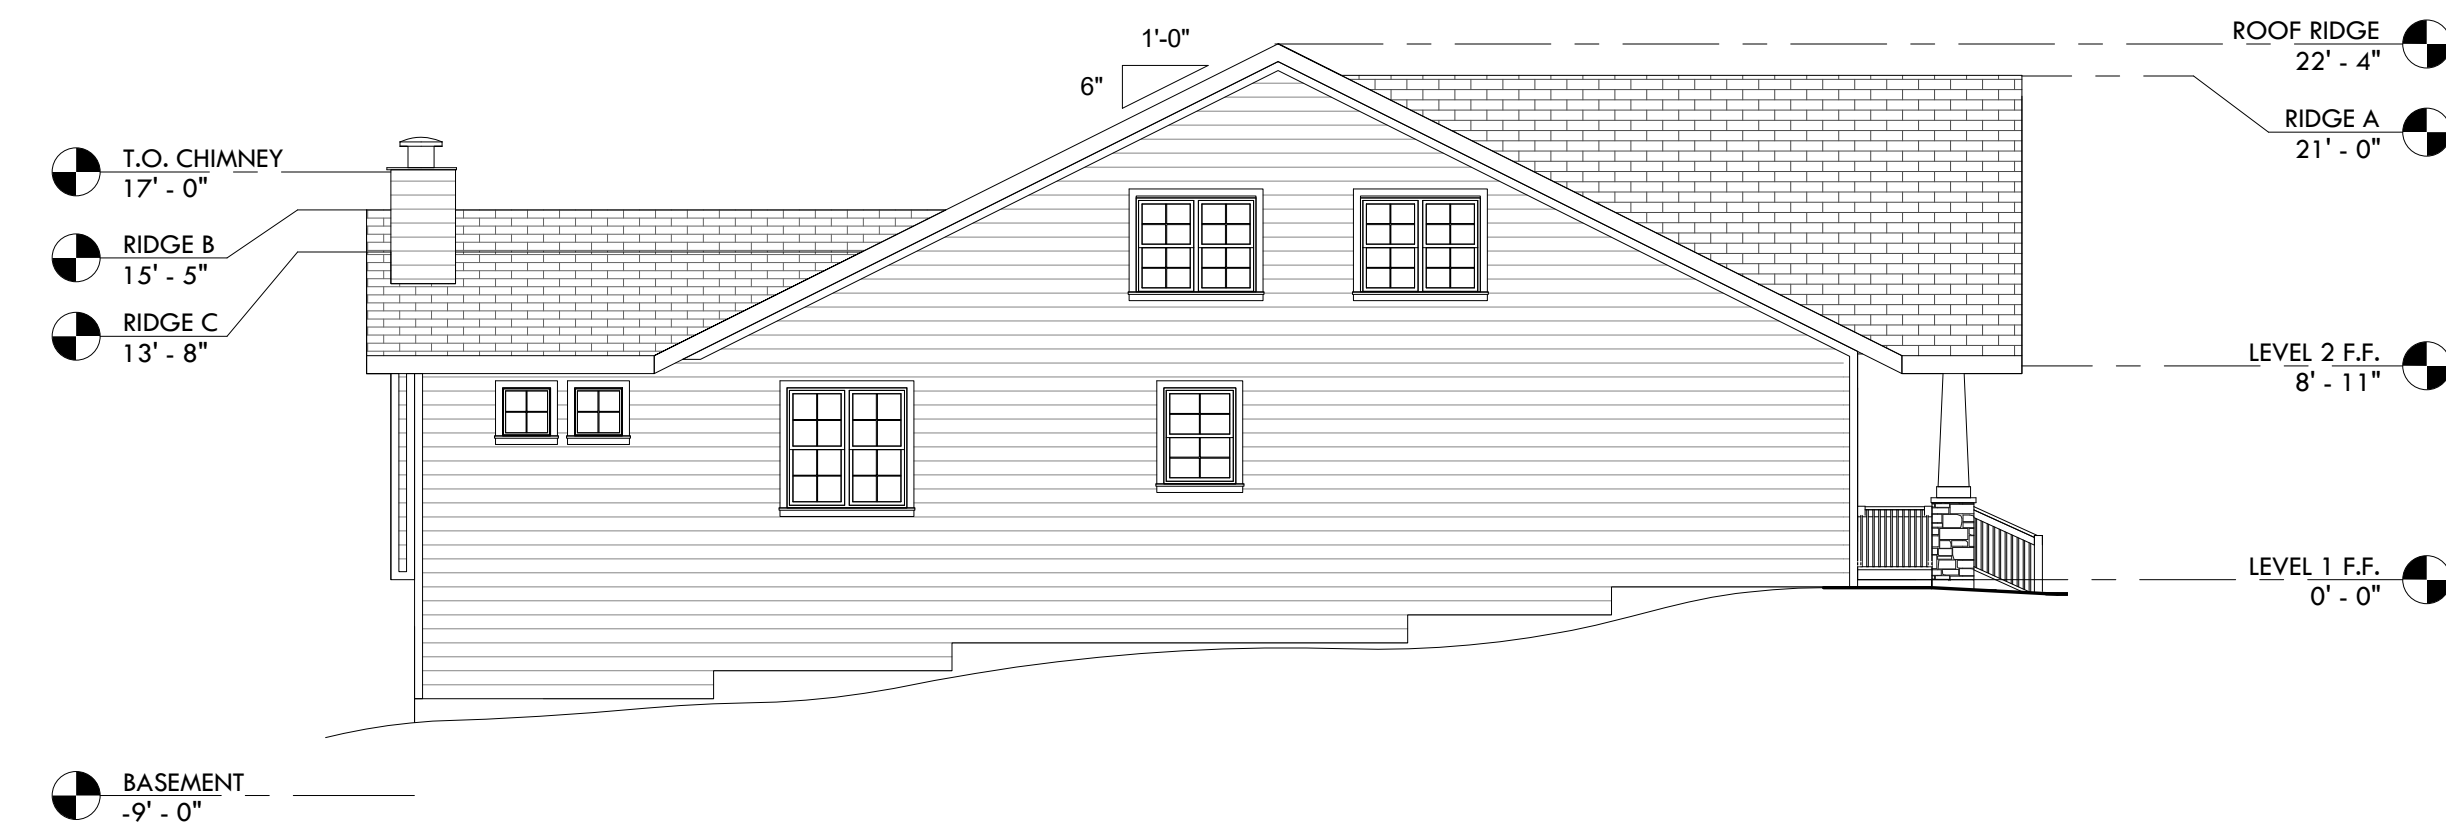

2 WEST ELEVATION  
1/8" = 1'-0"



3 NORTH ELEVATION  
1/8" = 1'-0"

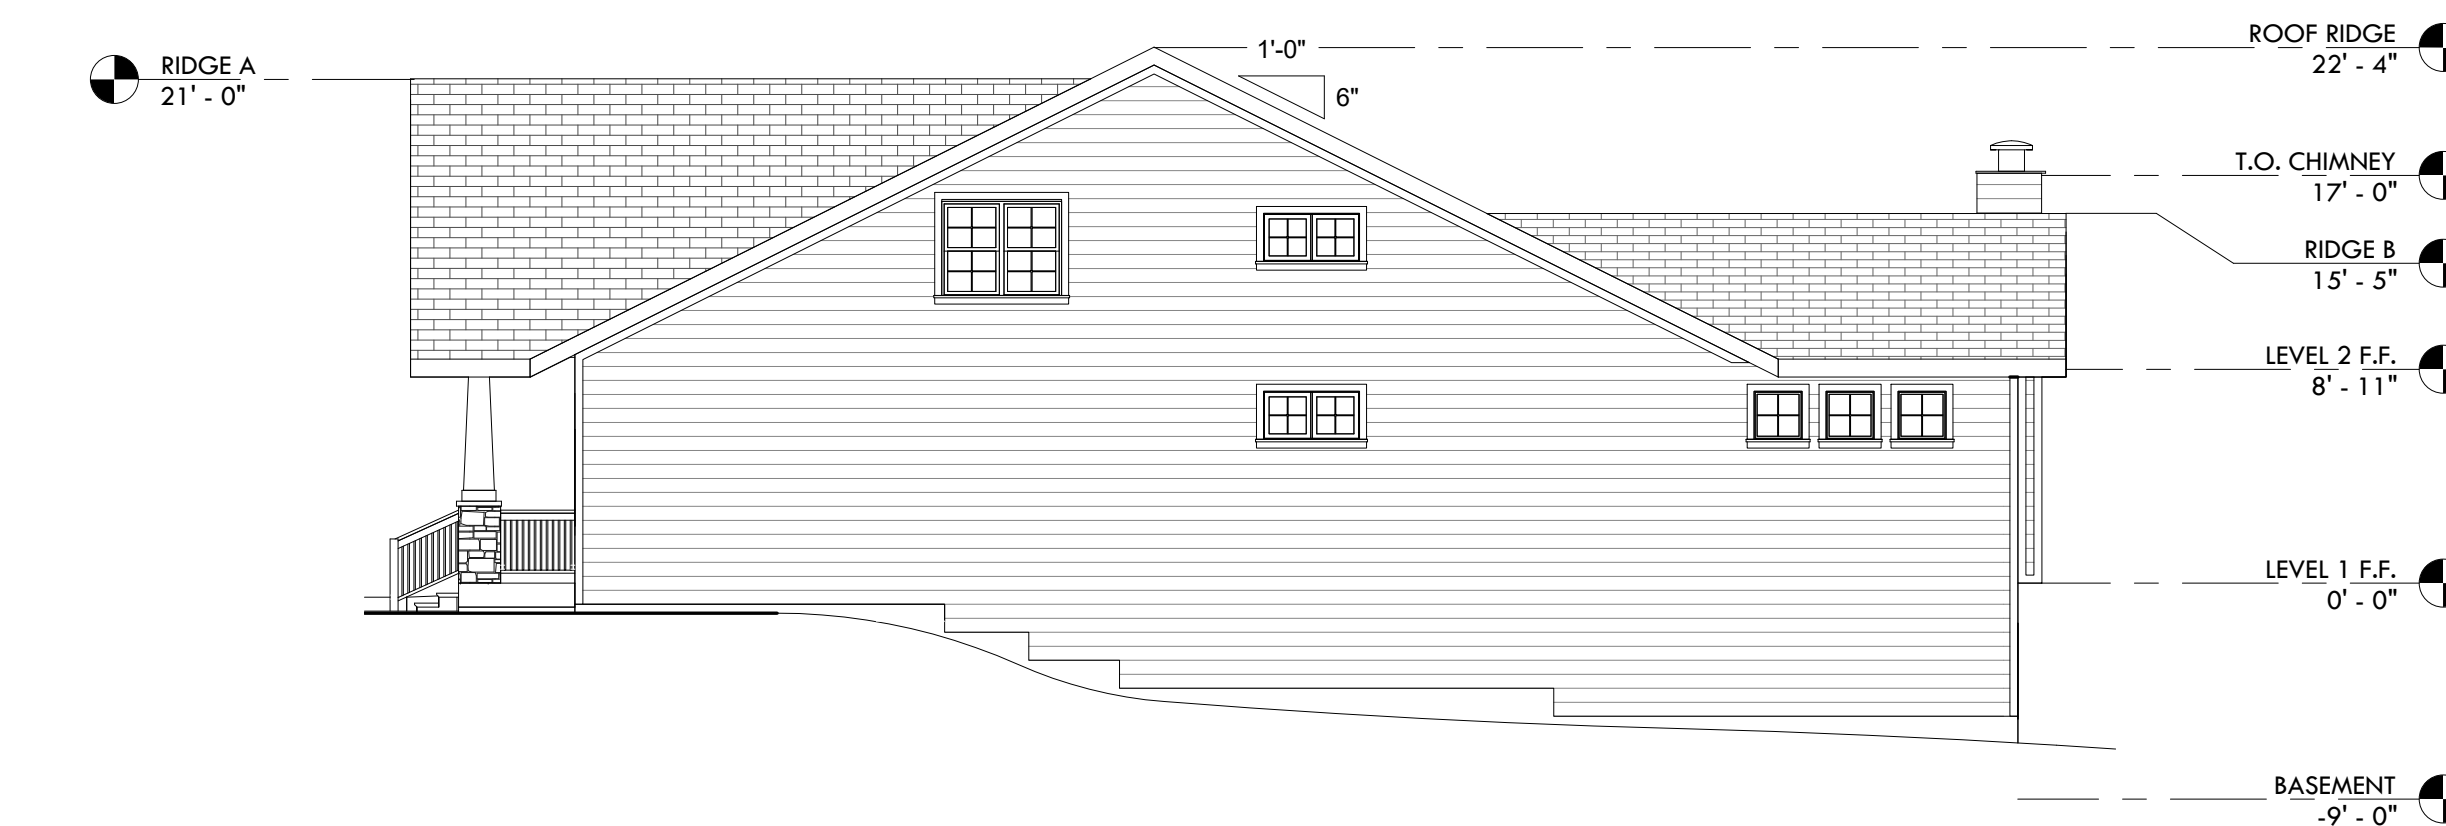

4 EAST ELEVATION  
1/8" = 1'-0"

**LifeHouse 1.2**

2 STORY, 5 BED, 3 BATH HOME

DATE 2020

**Exterior Elevations**