

Center for Inclusive Design and Environmental Access
School of Architecture and Planning

309 Hayes Hall Buffalo, NY 14214-8030 TEL: (716) 829-5902

NOT FOR CONSTRUCTION

1. EXTERIOR WALL STUDS ARE ASSUMED 2" X 8" (NOM.). VERIFY IF SUFFICIENT GIVEN REGIONAL

3. WALLS ARE ASSUMED 92-5/8" PRE-CUT STUDS W/ONE BOTTOM PLATE & TWO TOP PLATES. 4. FLOOR JOISTS ARE ASSUMED 2" X 10" (NOM.). VERIFY IF SUFFICIENT BASED ON LOCAL CODE &

5. SUBFLOORS ARE ASSUMED 5/8" PLYWOOD. 6. EXTERIOR WALL SHEATHING IS ASSUMED 5/8" PLYWOOD. SIDING IS NOT DEPICTED IN PLAN VIEW. 7. INTERIOR WALL FINISHES ARE ASSUMED 1/2"

8. CEILING FINISH IS ASSUMED 5/8" DRYWALL. 9. INTERIOR FLOOR FINISHES ARE NOT DEPICTED IN THIS WORK. FLOOR FINISHES TO BE SMOOTH, STABLE, FIRM, & SLIP-RESISTANT. WHERE CARPET IS PROVIDED, CARPET PILE IS TO BE NO HIGHER THAN 1/2".

TRANSITIONS BETWEEN FLOOR FINISHES SHOULD BE SMOOTH & FLUSH WHEREVER POSSIBLE. WHERE NOT POSSIBLE, THE MAXIMUM VERTICAL LEVEL CHANGE IS $\frac{1}{4}$ ". THE MAXIMUM BEVELED LEVEL CHANGE IS $\frac{1}{2}$ ", PROVIDED THE TOP 1/4" IS BEVELED AT A MAXIMUM

10. ROOF SLOPES ARE EQUAL ON EITHER SIDE OF RIDGE UNLESS OTHERWISE NOTED. 11. COORDINATE DIMENSIONS AT CLOSETS W/

INTENDED ELEVATOR SPECIFICATIONS, WHERE 12. HARDSCAPE SLOPES INDICATED FOR REFERENCE ONLY. ACTUAL SLOPES VARY BY SITE. SIDEWALK

SLOPES ARE NOT TO EXCEED 5% TO REMAIN WHEELCHAIR ACCESSIBLE WITHOUT THE NEED FOR

13. ALL DIMENSIONS SHOWN ARE MEASURED FROM FACE-OF-STUD UNLESS OTHERWISE NOTED.

2 STORY: 5 BED, 3 BATH HOME

Dimensioned Plans

	Dog	or Sche	edule	
Door	Panel			
Number	Width	Height	Thickness	Comments
100	3' - 6"	8' - 0"	0' - 1 3/4"	
101	5' - 0"	7' - 0"	0' - 1 1/2"	Bifold
102	5' - 0"	7' - 0"	0' - 1 1/2"	Bifold
103	5' - 0"	7' - 0"	0' - 1 1/2"	Paired
104	5' - 0"	7' - 0"	0' - 1 1/2"	Sliding
105	5' - 0"	7' - 0"	0' - 1 1/2"	Sliding
106	2' - 8"	7' - 0"	0' - 1 1/2"	
107	6' - 6"	7' - 0"	0' - 1 3/4"	Sliding
108	3' - 0"	7' - 0"	0' - 1 1/2"	
109	2' - 8"	7' - 0"	0' - 1 3/4"	
110	2' - 10"	7' - 0"	0' - 1 1/2"	
111	2' - 10"	7' - 0"	0' - 1 1/2"	
112	3' - 2"	7' - 0"	0' - 1 1/2"	
113	3' - 0"	7' - 0"	0' - 1 1/2"	
114	2' - 6"	7' - 0"	0' - 1 1/2"	
115	2' - 6"	7' - 0"	0' - 1 1/2"	
116	7' - 0"	7' - 0"	0' - 1 1/2"	Sliding
117	2' - 6"	7' - 0"	0' - 1 1/2"	
118	2' - 6"	7' - 0"	0' - 1 1/2"	
119	2' - 6"	7' - 0"	0' - 1 1/2"	
120	2' - 6"	7' - 0"	0' - 1 1/2"	
121	2' - 6"	7' - 0"	0' - 1 1/2"	
122	2' - 6"	7' - 0"	0' - 1 1/2"	
123	3' - 0"	7' - 0"	0' - 1 1/2"	
124	2' - 6"	7' - 0"	0' - 1 1/2"	
405	01 011	71 011	01 4 4 (01)	OI: II


6' - 0" | 7' - 0" | 0' - 1 1/2" | Sliding

Window Schedule					
Window Type	Width	Height	Sill Height		
201	5' - 0"	6' - 0"	2' - 0"		
202	3' - 0"	4' - 0"	4' - 0"		
203	5' - 0"	4' - 0"	3' - 0"		
204	3' - 0"	5' - 0"	3' - 0"		
205	5' - 0"	5' - 0"	3' - 0"		
206	2' - 0"	2' - 0"	6' - 0"		
207	2' - 0"	6' - 0"	2' - 0"		
208	6' - 4"	6' - 0"	2' - 0"		
209	4' - 0"	2' - 0"	6' - 0"		



 $1 \frac{\text{SOUTH ELEVATION}}{1/8" = 1'-0"}$



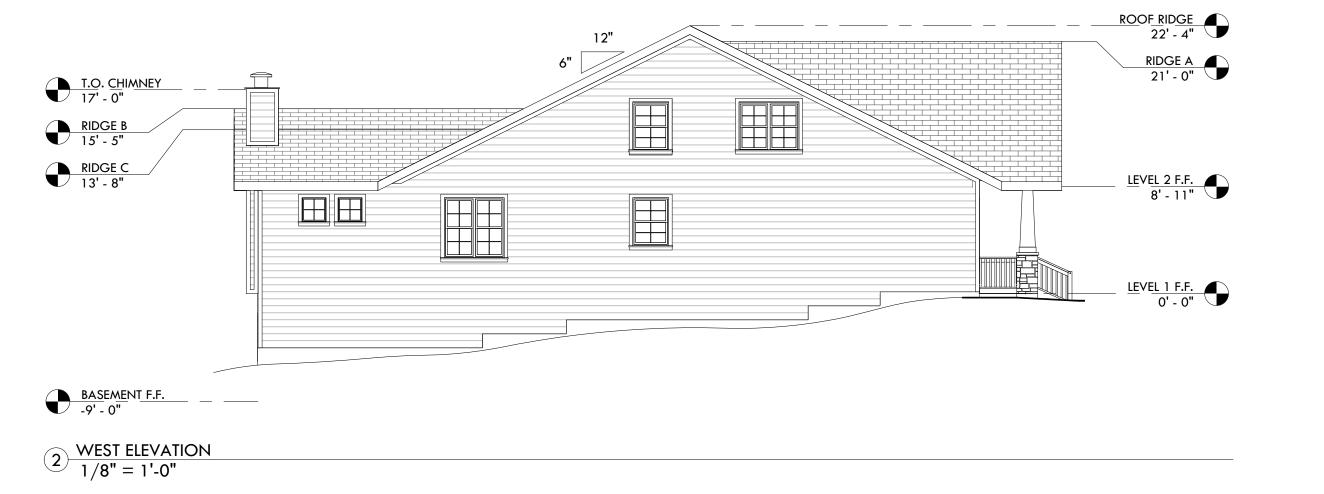





University at Buffalo

Center for Inclusive Design and Environmental Access School of Architecture and Planning

> 309 Hayes Hall Buffalo, NY 14214-8030 TEL: (716) 829-5902

NOT FOR CONSTRUCTION

NOTES

1. EXTERIOR WALL STUDS ARE ASSUMED 2" X 8" (NOM.). VERIFY IF SUFFICIENT GIVEN REGIONAL ENERGY REQUIREMENTS. 2. INTERIOR WALL STUDS ARE ASSUMED 2" X 4" (NOM.).

3. WALLS ARE ASSUMED 92-5/8" PRE-CUT STUDS W/ ONE BOTTOM PLATE & TWO TOP PLATES. 4. FLOOR JOISTS ARE ASSUMED 2" X 10" (NOM.). VERIFY IF SUFFICIENT BASED ON LOCAL CODE &

WOOD SPECIES/GRADE. 5. SUBFLOORS ARE ASSUMED 5/8" PLYWOOD. 6. EXTERIOR WALL SHEATHING IS ASSUMED 5/8" PLYWOOD. SIDING IS NOT DEPICTED IN PLAN VIEW. 7. INTERIOR WALL FINISHES ARE ASSUMED 1/2" DRYWALL.

8. CEILING FINISH IS ASSUMED 5/8" DRYWALL. 9. INTERIOR FLOOR FINISHES ARE NOT DEPICTED IN THIS WORK. FLOOR FINISHES TO BE SMOOTH, STABLE, FIRM, & SLIP-RESISTANT. WHERE CARPET IS PROVIDED, CARPET PILE IS TO BE NO HIGHER THAN 1/2". TRANSITIONS BETWEEN FLOOR FINISHES SHOULD BE SMOOTH & FLUSH WHEREVER POSSIBLE. WHERE NOT POSSIBLE, THE MAXIMUM VERTICAL LEVEL CHANGE IS 1/4". THE MAXIMUM BEVELED LEVEL CHANGE IS 1/2", PROVIDED THE TOP 1/4" IS BEVELED AT A MAXIMUM SLOPE OF 1:2.

10. ROOF SLOPES ARE EQUAL ON EITHER SIDE OF RIDGE UNLESS OTHERWISE NOTED. 11. COORDINATE DIMENSIONS AT CLOSETS W/

INTENDED ELEVATOR SPECIFICATIONS, WHERE 12. HARDSCAPE SLOPES INDICATED FOR REFERENCE ONLY. ACTUAL SLOPES VARY BY SITE. SIDEWALK SLOPES ARE NOT TO EXCEED 5% TO REMAIN WHEELCHAIR ACCESSIBLE WITHOUT THE NEED FOR

HANDRAILS. 13. ALL DIMENSIONS SHOWN ARE MEASURED FROM FACE-OF-STUD UNLESS OTHERWISE NOTED.

ABBREVIATIONS

CLR. - CLEAR F.F. - FINISH FLOOR T.O. - TOP OF

LifeHouse

2 STORY: 5 BED, 3 BATH HOME

2020 DATE

Exterior Elevations

A-201